

A large, detailed close-up of a tire tread pattern is shown in the upper half of the image. The tread consists of numerous raised, rectangular blocks arranged in a staggered, overlapping pattern. The blocks have a textured surface and are set against a dark background, creating a strong sense of depth and three-dimensionality. The lighting highlights the edges and surfaces of the tread blocks.

# 2017 ContiTread™

## Commercial Vehicle Tires

THE ORIGINAL RETREAD TIRE DESIGN THAT PERFORMS JUST LIKE A NEW TIRE. From the day we started selling them, Continental retreaded tire products have been the optimal choice for drivers who demand more from their retreads. Continental's retreads have always utilized the same tread design and compound engineering as our new tires, and they perform just as efficiently.

# Comparison Chart

Continental	Bandag	Michelin	Goodyear
CityService HA3	BRM2, BRM3	XZUS	G686
HCS - 32	BDY2	XZL, XZH	G177 Modified
HDC1 - 26	BDX	XDE M/S	G677 MSD
HDC1 HT - 32	BDY2	XDY-EX	G741 MSD
HDL - 26	Ultra Drive	XDA-HT	G362
HDL - 20	FCR Drive	XDHT	G362
HDL - 13	BTT2	XDC LL	G362
HDL Eco Plus - 26	B710 Fuel Tech	XDA2	G572 LHD Fuel Max
HDL Eco Plus - 20	FCR Drive	XDA2	Fuel Max LHD G505D
HDL2 DL - 28	MegaTrek	XD4	G328
HDL2 DL Eco Plus - 28	FuelTech Drive	XDA2	G572 LHD Fuel Max
HDL2 Eco Plus - 24	B835 FuelTech	X One Line Energy D	G392 SSD Fuel Max
HDR1 - 26	Ultra Drive	XDC	G338
HDR1 - 22	BDR-AS	XDC	G622
HDR1 - 20	BDL	XDC	G622
HDR1 - 16	BDL	XDC	G622 LT
HDR1 Eco Plus - 22	BDR-AS	XDC	G622
HDR2 - 26	BDR-HT3	XDN2	G282 MSD
HDR2 - 22	BDR-AS	XDN2	G167
HDR2 Eco Plus - 26			G682 RSD Fuel Max
CityService HD3	BDM2	XDUS	
HDW2 - 27	BDR-W	XDS2	G622 RSD
Scandinavia HD3		XDS2	
HSC - 23	RTP	XZY3	G287 MSA
HSC - 18	BRX	XZY	G287 MSA
HSC1 - 24	BRM2	XZY3	G287 MSA
HSR - 23	BVD	XZE	G661 HSA
HSR - 18	Ultra All Position	XZE	G661 HSA
HSR - 16	FCR Rib	XZE	G661 HSA
HSR1 - 16	FCR Rib	XZA	G647 RSA
HSR2 - 20	-	XZE2	G661 HSA
HSR2 - 18	Ultra All Position	XZE	G661 HSA
HSU2 - 26	BRM2	XZUS	G289 WHA
HTC1 - 24	BRM-WB	XZY Wide Base	G296 MSA
HTL - 13	FCR	XTA-1	G314
EcoPlus HT3 - 13	FuelTech Trailer	XT-1AT	G316 AT Fuel Max
HTL Eco Plus - 13	FuelTech Trailer	XT-1AT	G316 AT Fuel Max
HTL1 - 13	B135 FuelTeck	X One Line Energy T	G394 SST Fuel Max
HTR2 - 22	ECL ST-M	XZA Wide Base	G296 MSA
HTR2 SA - 16	BTL-SA	XZE-SA	G619 RST
LSR1 - 15	FCR Rib	XZA	G159

# Tread Reference Guide

Tread	160	170	180	185	188	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	270	280	290	320	340	350	360	380	390	400	410		
<b>HSR</b>			18/32"	18/32"	18/32"	18/32"	18/32"	18/32"	18/32"	18/32"	18/32"	18/32"	18/32"	18/32"	18/32"	18/32"	18/32"	18/32"	18/32"	18/32"	23/32"												
<b>HSR1</b>		16/32"				16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"													
<b>HSR2</b>					18/32"	18/32"	18/32"	18/32"	18/32"	20/32"	20/32"	20/32"	20/32"	20/32"	20/32"	20/32"	20/32"	20/32"	20/32"	20/32"													
<b>HSC</b>										23/32"	23/32"	23/32"	23/32"	23/32"	23/32"	23/32"	23/32"	23/32"	23/32"	23/32"													
<b>HSC1</b>										18/32"	18/32"	18/32"	18/32"	18/32"	18/32"	18/32"	18/32"	18/32"	18/32"	18/32"													
<b>HSU2</b>										24/32"	24/32"	24/32"	24/32"	24/32"	24/32"	24/32"	24/32"	24/32"	24/32"	24/32"													
<b>CityServiceHA3</b>										26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"		
<b>HCS</b>										32/32"	32/32"	32/32"	32/32"	32/32"	32/32"	32/32"	32/32"	32/32"	32/32"	32/32"													
<b>LSR1</b>	15/32"	15/32"	15/32"	15/32"	15/32"	15/32"	15/32"	15/32"	15/32"																								
<b>HDL Eco Plus</b>										26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"													
<b>HDL</b>										20/32"	20/32"	20/32"	20/32"	20/32"	20/32"	20/32"	20/32"	20/32"	20/32"	20/32"													
<b>HDR1</b>	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"													
<b>HDR2</b>										22/32"	22/32"	22/32"	22/32"	22/32"	22/32"	22/32"	22/32"	22/32"	22/32"	22/32"													
<b>HDR2 Eco Plus</b>										26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"													
<b>Conti CityService HD3</b>										26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"	26/32"													
<b>HDC1</b>										32/32"	32/32"	32/32"	32/32"	32/32"	32/32"	32/32"	32/32"	32/32"	32/32"	32/32"													
<b>HDC1 HT</b>										32/32"	32/32"	32/32"	32/32"	32/32"	32/32"	32/32"	32/32"	32/32"	32/32"	32/32"													
<b>HDL2 Eco Plus</b>										28/32"	28/32"	28/32"	28/32"	28/32"	28/32"	28/32"	28/32"	28/32"	28/32"	28/32"													
<b>HDL2 DL</b>										28/32"	28/32"	28/32"	28/32"	28/32"	28/32"	28/32"	28/32"	28/32"	28/32"	28/32"													
<b>HDL2 DL Eco Plus</b>										28/32"	28/32"	28/32"	28/32"	28/32"	28/32"	28/32"	28/32"	28/32"	28/32"	28/32"													
<b>HDW2</b>										27/32"	27/32"	27/32"	27/32"	27/32"	27/32"	27/32"	27/32"	27/32"	27/32"	27/32"													
<b>Scandinavia HD3</b>										25/32"	25/32"	25/32"	25/32"	25/32"	25/32"	25/32"	25/32"	25/32"	25/32"	25/32"													
<b>EcoPlus HT3</b>										13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"													
<b>HTL ECO PLUS</b>										13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"													
<b>HTL</b>										13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"													
<b>HTL1</b>										13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"	13/32"													
<b>HTR2</b>																																	
<b>HTR2 SA</b>										16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"													
<b>HTG1</b>										16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"	16/32"													

# Casing Fitment Guide

150	160	170	180	185	195	200	205	210	215	220	225
9R22.5	215/85R16	215/85R16	215/85R16	215/85R16	215/85R16	225/75R16	10R22.5	225/75R16	235/85R16	235/75R17.5	285/70R19.5
215/85R16	225/75R16	225/75R16	225/75R16	225/75R16	225/75R16	235/85R16	11R22.5	235/85R16	235/75R17.5	245/70R17.5	275/80R22.5
	235/85R16	235/85R16	235/85R16	235/85R16	235/85R16	245/75R16	11R24.5	245/75R16	245/70R17.5	245/70R19.5	295/75R22.5
	215/75R17.5	215/75R17.5	245/75R16	245/75R16	245/75R16	215/75R17.5	12.00R24	235/75R17.5	225/70R19.5	265/70R19.5	295/80R22.5
	235/75R17.5	235/75R17.5	215/75R17.5	215/75R17.5	215/75R17.5	235/75R17.5	12R22.5	245/70R17.5	245/70R19.5	285/70R19.5	285/75R24.5
	10R17.5	225/70R19.5	235/75R17.5	235/75R17.5	235/75R17.5	245/70R17.5	12R24.5	225/70R19.5	265/70R19.5	255/70R22.5	11R22.5
	9R22.5	10R17.5	225/70R19.5	225/70R19.5	225/70R19.5	225/70R19.5	225/70R19.5	245/70R19.5	285/70R19.5	275/70R22.5	12R22.5
		9R22.5	245/70R19.5	245/70R19.5	245/70R19.5	245/70R19.5	225/75R16	265/70R19.5	255/70R22.5	275/80R22.5	12.00R24
		10R22.5	255/70R22.5	265/70R19.5	265/70R19.5	265/70R19.5	235/75R17.5	285/70R19.5	275/70R22.5	295/75R22.5	11R24.5
			10R17.5	255/70R22.5	255/70R22.5	255/70R22.5	235/85R16	255/70R22.5	275/80R22.5	295/80R22.5	12R24.5
			9R22.5	10R17.5	10R17.5	10R17.5	245/70R17.5	275/70R22.5	295/75R22.5	285/75R24.5	
			10R22.5	9R22.5	9R22.5	10R22.5	245/70R19.5	275/80R22.5	285/75R24.5	10R22.5	
				10R22.5	10R22.5	12.00R24	245/75R16	295/75R22.5	10R22.5	11R22.5	
							255/70R22.5	285/75R24.5	11R22.5	12R22.5	
							265/70R19.5	10R22.5	12R22.5	12.00R24	
							275/70R22.5	11R22.5	12.00R24	11R24.5	
							275/80R22.5	12R22.5	11R24.5	12R24.5	
							285/70R19.5	12.00R24	12R24.5		
							285/75R24.5	11R24.5			
							295/75R22.5	12R24.5			
							245/75R22.5				
							265/75R22.5				
230	235	240	245	250	260	270	280	290	320	340	350
230	235	240	245	250	260	270	280	290	320	340	350
275/80R22.5	275/80R22.5	275/80R22.5	295/75R22.5	365/80R20	315/80R22.5	315/80R22.5	315/80R22.5	365/80R20	365/80R20	18R19.5	18R19.5
295/75R22.5	295/75R22.5	295/75R22.5	275/80R22.5	305/70R22.5	305/75R24.5	305/75R24.5		385/65R22.5	385/65R22.5	18R22.5	18R22.5
285/75R24.5	285/75R24.5	295/80R22.5	285/75R24.5	315/80R22.5					425/65R22.5	445/65R22.5	445/65R22.5
11R22.5	11R22.5	305/70R22.5	295/80R22.5	12.00R24						445/65R19.5	445/65R19.5
12R22.5	12R22.5	315/80R22.5	365/80R20							445/50R22.5	445/50R22.5
12.00R24	12.00R24	285/75R24.5	305/70R22.5							425/65R22.5	425/65R22.5
11R24.5	11R24.5	11R22.5	315/80R22.5								
12R24.5	12R24.5	12R22.5	12.00R24								
		12.00R24	11R22.5								
		11R24.5	11R24.5								
		12R24.5									
360	380	390	400	410							
445/65R22.5	445/65R22.5	445/50R22.5	445/50R22.5	445/50R22.5							
		455/55R22.5	455/55R22.5	455/55R22.5							

Not a technical recommendation or guide. For use as sales information only. Please consult your local authorized ContiTread™ dealer for technical specifications.

# All Position

## HSR 23/32"

ARTICLE #	WIDTH	DEPTH
18204730000	215	23/32"
18204740000	225	23/32"
18204750000	235	23/32"
18204760000	245	23/32"
18310600000	260	23/32"

- Deep cut and chip resistant tread for long tread life.
- Pyramidal stone ejectors in all tread grooves to stop stone retention for long casing life.
- Robust shoulder rib for long tread life.

Application: Regional Hauling & On/Off, All Position

## HSR 16/32"

ARTICLE #	WIDTH	DEPTH
18310030000	180	16/32"
18310460000	195	16/32"

- 16/32" cut and chip resistant tread for long tread life.
- Aggressive tread design provides excellent lateral stability to minimize squirm, and improve wet handling performance.
- Closed shoulder to protect against curbing, cuts and abrasions.

Application: Regional Hauling & On/Off, All Position

## HSR2 20/32"

ARTICLE #	WIDTH	DEPTH
18310510000	215	20/32"
18310520000	225	20/32"
18310530000	235	20/32"

- Optimized cut and chip resistant tread compound.
- Patented groove geometry for better resistance to cracking and tearing and minimum stone retention.

Application: Regional Hauling & On/Off, All Position

## HSC 23/32"

ARTICLE #	WIDTH	DEPTH
18205510000	215	23/32"
18205520000	225	23/32"
18205530000	235	23/32"
18207640000	245	23/32"

- On/Off-road compound increases resistance to cuts, chips and chunks, reduces the number, and most importantly the depth of any cuts and tears.
- Patented groove technology leads to minimum stone retention, extending casing life.

Application: On/Off Road, All Position

## HSR 18/32"

ARTICLE #	WIDTH	DEPTH
18208610000	185	18/32"
18207940000	195	18/32"
18204780000	215	18/32"
18204790000	225	18/32"
18204800000	235	18/32"
18204810000	245	18/32"
18310610000	260	18/32"

- Shallower cut and chip resistant tread for long tread life.
- Pyramidal stone ejectors in all tread grooves to stop stone retention for long casing life.
- Robust shoulder rib for long tread life.

Application: Regional Hauling & On/Off, All Position

## HSR1 16/32"

ARTICLE #	WIDTH	DEPTH
18310020000	215	16/32"
18211270000	205	16/32"
18207900000	225	16/32"
18207910000	235	16/32"

- Tread compound design to provide long life in regional applications.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.
- Tread pattern designed for excellent wet traction and reduced noise.

Application: All Position, Short and Long Haul, On/Off Highway Service (depending on conditions)

## HSR2 18/32"

ARTICLE #	WIDTH	DEPTH
18310500000	200	18/32"

- Optimized cut and chip resistant tread compound.
- Patented groove geometry for better resistance to cracking and tearing and minimum stone retention.

Application: Regional Hauling & On/Off, All Position

## HSC 18/32"


ARTICLE #	WIDTH	DEPTH
18205480000	215	18/32"
18205490000	225	18/32"
18205500000	235	18/32"
18205820000	245	18/32"
18205830000	255	18/32"

- On/Off-road compound increases resistance to cuts, chips and chunks, reduces the number, and most importantly the depth of any cuts and tears.
- Patented groove technology leads to minimum stone retention, extending casing life.

Application: On/Off Road, All Position




**HSC1 24/32"**

	ARTICLE #	WIDTH	DEPTH
	18207080000	215	24/32"
	18207090000	225	24/32"
	18207100000	235	24/32"
	18207110000	245	24/32"
	18207120000	255	24/32"

- Tread pattern and compound integrated to deliver optimal mileage.
- Wide tread and shoulder ribs improve wear and increase performance.

Application: Coal haulers, logging, construction, waste haulers and other All Position service


**Conti CityService HA3 26/32"**

	ARTICLE #	WIDTH	DEPTH
	18211300000	220	26/32"
	18211310000	230	26/32"
	18211320000	240	26/32"
	18210500000	250	26/32"
	18210510000	260	26/32"
	18210520000	270	26/32"
	18210530000	280	26/32"

- Optimized tread compound for long removal mileage.
- Robust four rib tread design for increased durability in high scrub applications.
- Zig-zag groove geometry engineered specifically for use in waste haul.

Application: Waste haul, All Position


**LSRI 15/32"**

	ARTICLE #	WIDTH	DEPTH
	18206070000	160	15/32"
	18206080000	180	15/32"
	18206090000	188	15/32"
	18206100000	195	15/32"
	18207890000	205	15/32"

- Advanced tread compound provides high mileage in regional applications.
- Multi-rib tread design features excellent wet traction, lateral stability and reduced noise.
- Unique pyramid shaped stone ejection system in all tread grooves reduce stone retention and casing penetrations.

Application: All-Position, Short & Long Haul


**HSU2 26/32"**

	ARTICLE #	WIDTH	DEPTH
	18207160000	250	26/32"
	18207170000	260	26/32"
	18207180000	270	26/32"
	18207190000	280	26/32"

- Shallower cut and chip resistant tread for long tread life.
- Pyramidal stone ejectors in all tread grooves to stop stone retention for long casing life.
- Robust shoulder rib for long tread life.


Application: Regional Hauling & On/Off, All Position, Waste Haul

**HCS 32/32"**


	ARTICLE #	WIDTH	DEPTH
	18206930000	215	32/32"
	18206940000	225	32/32"
	18211290000	235	32/32"
	18206950000	245	32/32"
	18209220000	360	32/32"
	18209230000	380	32/32"

- Cut and tear resistant tread compound for long tread life in On/Off road conditions.
- Outstanding self-cleaning properties ensure a long service life.
- Aggressive tread pattern provides excellent traction.

Application: Construction & On/Off Highway Service, All Position

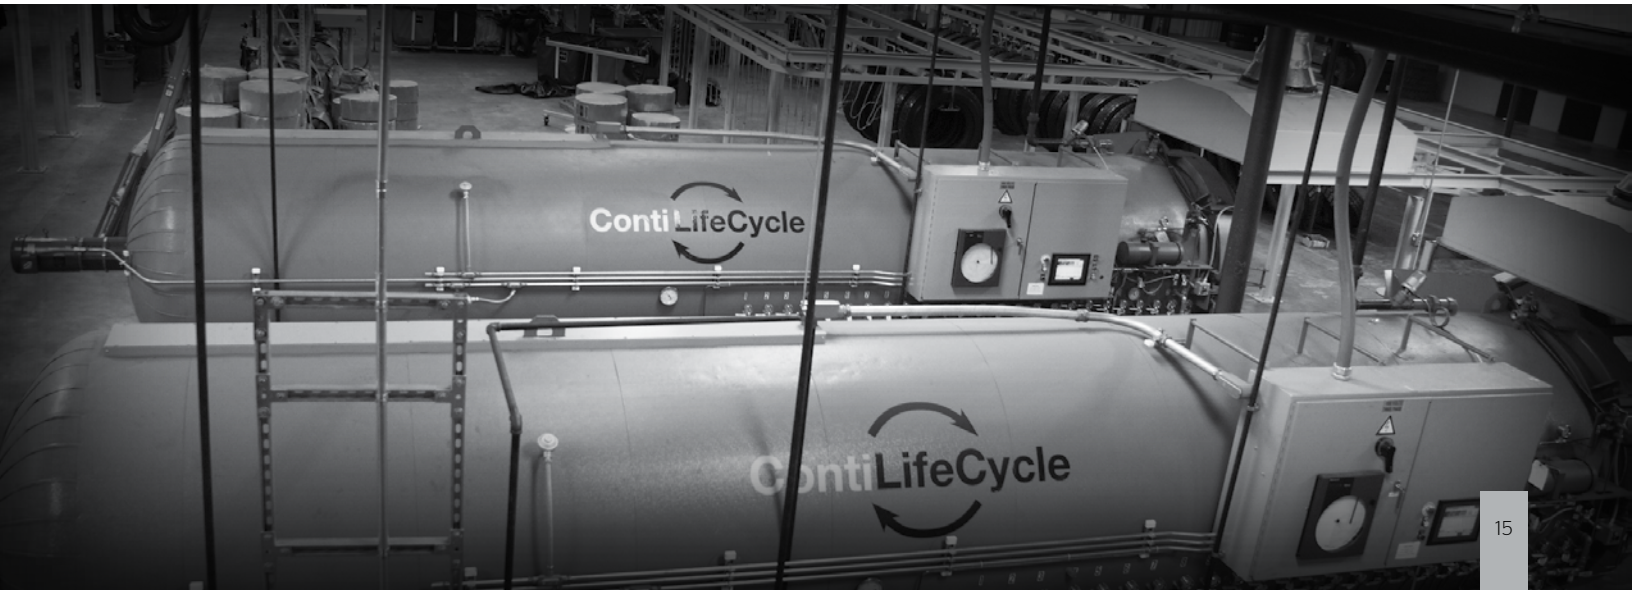


# Drive Position

<b>HDL EP 26/32"</b>	<b>ARTICLE #</b>	<b>WIDTH</b>	<b>DEPTH</b>
	18204820000	215	26/32"
	18204830000	225	26/32"
	18204840000	235	26/32"
	18204850000	245	26/32"


- Advanced, fuel efficient compound provides long original mileage and rolling resistance.
- Closed shoulder 26/32" tread design provides even tread wear while still providing excellent traction.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

Application: Long Haul, Over the Highway, Drive Position

<b>HDL EP 20/32"</b>	<b>ARTICLE #</b>	<b>WIDTH</b>	<b>DEPTH</b>
	18204860000	215	20/32"
	18204870000	225	20/32"
	18204880000	235	20/32"
	18204890000	245	20/32"


- Advanced, fuel efficient compound provides long original mileage and rolling resistance.
- Closed shoulder 20/32" tread design provides even tread wear while still providing excellent traction.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

Application: Long Haul, Over the Highway, Drive Position

<b>HDL 26/32"</b>	<b>ARTICLE #</b>	<b>WIDTH</b>	<b>DEPTH</b>
	18208240000	215	26/32"
	18208250000	225	26/32"
	18208260000	235	26/32"
	18208310000	245	26/32"


- Cut and tear resistant tread compound for excellent wear in regional and light On/Off drive applications.
- Closed shoulder 26/32" tread design provides even tread wear while still providing excellent traction.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

Application: Long Haul, Over the Highway, Drive Position

<b>HDL 20/32"</b>	<b>ARTICLE #</b>	<b>WIDTH</b>	<b>DEPTH</b>
	18208270000	215	20/32"
	18208280000	225	20/32"
	18208290000	235	20/32"
	18208300000	245	20/32"


- Cut and tear resistant tread compound for excellent wear in regional and light On/Off drive applications.
- Closed shoulder 20/32" tread design provides even tread wear while still providing excellent traction.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

Application: Long Haul, Over the Highway, Drive Position

<b>HDL 13/32"</b>	<b>ARTICLE #</b>	<b>WIDTH</b>	<b>DEPTH</b>
	18207920000	200	13/32"
	18207930000	215	13/32"
	18313000000	225	13/32"
	18206260000	235	13/32"


- Cut and tear resistant tread compound for excellent wear in regional and light On/Off drive applications.
- Closed shoulder 13/32" tread design provides even tread wear and traction for trade truck use.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

Application: Long Haul, Over the Highway, Drive Position, Trade Truck Drive

<b>HDR1 26/32"</b>	<b>ARTICLE #</b>	<b>WIDTH</b>	<b>DEPTH</b>
	18208840000	215	26/32"
	18208850000	225	26/32"
	18208860000	235	26/32"
	18208870000	245	26/32"


- Cut and tear resistant tread compound for excellent wear in regional and light on/off applications.
- Open shoulder tread design provides excellent wet/dry traction, resists irregular wear and reduces stone retention.
- Innovative lug angle provides outstanding traction throughout the life of the original tire.

Application: Regional Hauling & Light On/Off, Drive Position

<b>HDR1 22/32"</b>	<b>ARTICLE #</b>	<b>WIDTH</b>	<b>DEPTH</b>
	18207790000	215	22/32"
	18207800000	225	22/32"
	18207810000	235	22/32"
	18207820000	245	22/32"

- Cut and tear resistant tread compound for excellent wear in regional and light on/off applications.
- Open shoulder tread design provides excellent wet/dry traction, resists irregular wear and reduces stone retention.
- Innovative lug angle provides outstanding traction throughout the life of the original tire.

Application: Regional Hauling & Light On/Off, Drive Position

<b>HDR1 EP 22/32"</b>	<b>ARTICLE #</b>	<b>WIDTH</b>	<b>DEPTH</b>
	18207700000	215	22/32"
	18207710000	225	22/32"
	18207720000	235	22/32"
	18207730000	245	22/32"

- Advanced, fuel efficient compound provides long original mileage and rolling resistance.
- Open shoulder tread design provides excellent wet/dry traction, resists irregular wear and reduces stone retention.
- Innovative lug angle provides outstanding traction throughout the life of the original tire.

Application: Regional hauling & light On/Off, Drive position

**HDR1 20/32"**

ARTICLE #	WIDTH	DEPTH
18207880000	190	20/32"
18207870000	200	20/32"

- Cut and tear resistant tread compound for excellent wear in regional and light on/off applications.
- Open shoulder tread design provides excellent wet/dry traction, resists irregular wear and reduces stone retention.
- Innovative lug angle provides outstanding traction throughout the life of the original tire.

Application: Regional Hauling & Light On/Off, Drive Position

**HDR2 22/32"**

ARTICLE #	WIDTH	DEPTH
18208690000	185	22/32"
18208700000	195	22/32"

- Cut and tear resistant tread compound for excellent wear in regional and light On/Off applications.
- Optimal power transmission on various road conditions, through an innovative tread compound.
- Unidirectional, arrow shaped tread pattern minimizes typical drive tire wear effects.


Application: Regional Hauling & Light On/Off, Drive Position

**HDR2 26/32"**

ARTICLE #	WIDTH	DEPTH
18208710000	205	26/32"
18315110000	215	26/32"
18315120000	225	26/32"
18315130000	235	26/32"
18315140000	245	26/32"

- Cut and tear resistant tread compound for excellent wear in regional and light On/Off drive applications.
- Optimal power transmission on various road conditions, through an innovative tread compound.
- Unidirectional, arrow shaped tread pattern minimizes typical drive tire wear effects.

Application: Regional Hauling & Light On/Off, Drive Position

**HDL2 DL EP 28/32"**

ARTICLE #	WIDTH	DEPTH
18208070000	215	28/32"
18208080000	225	28/32"
18208090000	235	28/32"
18208100000	245	28/32"

- Advanced, fuel efficient compound provides long original mileage and rolling resistance.
- Minimized wear and excellent traction over the life of the tire through a wide, closed shoulder tread and numerous tread blocks with multiple grip edges.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

Application: Long Haul, over the highway, drive position

**HDR1 16/32"**

ARTICLE #	WIDTH	DEPTH
18209340000	160	16/32"
18209350000	170	16/32"
18209360000	180	16/32"
18207840000	190	16/32"
18207850000	200	16/32"
18207860000	215	16/32"

- Cut and tear resistant tread compound for excellent wear in regional and light On/Off applications.
- Open shoulder tread design provides excellent wet/dry traction, resists irregular wear and reduces stone retention.
- Innovative lug angle provides outstanding traction throughout the life of the original tire.

Application: Regional Hauling & Light On/Off, Drive Position

**HDR2 EP 26/32"**

ARTICLE #	WIDTH	DEPTH
18208110000	215	26/32"
18208120000	225	26/32"
18208130000	235	26/32"
18208140000	245	26/32"

- Advanced, fuel efficient compound provides long original mileage and rolling resistance.
- Optimal power transmission on various road conditions, through an innovative tread compound.
- Unidirectional, arrow shaped tread pattern minimizes typical drive tire wear effects.

Application: Regional Hauling & Light On/Off, Drive Position

**HDL2 DL 28/32"**

ARTICLE #	WIDTH	DEPTH
18207130000	215	28/32"
18207140000	225	28/32"
18207150000	235	28/32"
18208190000	245	28/32"
18209420000	260	28/32"

- Optimized compound for regional/long hauling with ultra deep tread delivers high mileage.
- Minimized wear and excellent traction over the life of the tire through a wide, closed shoulder tread and numerous tread blocks with multiple grip edges.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

Application: Long Haul, Over the Highway, Drive Position

**HDC1 26/32"**

ARTICLE #	WIDTH	DEPTH
18207520000	200	26/32"
18206960000	215	26/32"
18206970000	225	26/32"
18206980000	235	26/32"
18206990000	245	26/32"
18207000000	260	26/32"
18207010000	280	26/32"


- On/Off-road compound increases resistance to cuts, chips and chunks, reduces the number, and most importantly the depth of any cuts and tears.
- Aggressive, open shoulder tread design ensures reliable grip and good handling both on and off the road.

Application: On/Off & Off the Road, Drive



# Drive Position

## HDC1HT 32/32"




ARTICLE #	WIDTH	DEPTH
18211140000	225	32/32"
18211150000	235	32/32"
18211160000	245	32/32"

- Diamond shaped tread lug design and shoulder notches are optimal for chaining.
- Alternating groove geometry and stone bumper system for maximum stone ejection.
- Aggressive cut and chip resistant compounding to resist the most severe of applications.

Application: Heavy Drive Construction High Traction

## HDL2 EP 24/32"




ARTICLE #	WIDTH	DEPTH
18209240000	390	24/32"
18206780000	400	24/32"

- Super single drive tire with advanced compounding for low rolling resistance and long mileage.

Application: Long Haul, over the highway, drive position

## CityService HD3




ARTICLE #	WIDTH	DEPTH
18209150000	220	32/32"
18209160000	230	32/32"
18209170000	240	32/32"
18209180000	250	32/32"
18209190000	260	32/32"
18209200000	270	32/32"
18209210000	280	32/32"

- Deep 32/32" tread depth and open shoulder tread design for excellent traction.
- Shoulder notches included in design to prevent heat build-up.
- Chip and chunk resistant compounding for endurance in waste and other high scrub applications.
- Tie bars included to improve wear mileage near end of life.

Application: Waste, Urban, Construction. Drive position.

## HDW2 27/32"



ARTICLE #	WIDTH	DEPTH
18209370000	215	27/32"
18209380000	225	27/32"
18209390000	235	27/32"
18209400000*	245	27/32"
18209410000*	260	27/32"

- All season tire ensures optimum performance in a variety of winter conditions from ice to deep snow.
- Directional\* tread design with more than 1,000 sipes provides excellent traction and lateral stability in 245 and 260 mm treads.

Application: Extreme weather conditions, drive position

## Scandinavia HD3



ARTICLE #	WIDTH	DEPTH
18211350000	220	25/32"
18211360000	230	25/32"


- Directional\* tread pattern for improved traction.
- Full sipes located on center ribs in center grooves at 22/32" for improved snow evacuation.
- Pocket sipes featured throughout the tread pattern at 13/32"
- Optimized groove geometry for stone trapping resistance.
- Tie bars included to improve wear mileage near end of life.

Application: Heavy snow/mud, drive position



# Trailer Position

## EcoPlusHT3 13/32"



ARTICLE #	WIDTH	DEPTH
18208620000	215	13
18208630000	225	13
18208640000	235	13
18208650000	245*	13

- Ultra low rolling resistant compounding.
- Optimized tread pattern resists irregular wear.
- 13/32<sup>nd</sup> tread depth for long removal mileage.
- Fuel Saving Edge technology available in 245mm tread width for maximum fuel efficiency.

Application: Long Haul, Over the Highway, Trailer Position

## HTL 13/32"



ARTICLE #	WIDTH	DEPTH
18208720000	200	13/32"
18205420000	210	13/32"
18205440000	220	13/32"
18205460000	230	13/32"
18206800000	240	13/32"

- 13/32" tread depth minimizes tread squirm and irregular wear.
- Visual Alignment Indicators (VAI®) alert user to tire tracking problems.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

Application: Long Haul, Over the Highway, Trailer Position

## HTR2 SA 16/32"




ARTICLE #	WIDTH	DEPTH
18207530000	210/240	16/32"
18207540000	220/250	16/32"
18207550000	230/260	16/32"
18207560000	240/270	16/32"
18207570000	250/280	16/32"
18207580000	260/290	16/32"
18207590000	270/300	16/32"
18207600000	290/320	16/32"

- High mileage achieved through precise balance of tread compound and geometry.
- Winged tread for use in high scub applications.

Application: Local and Long haul, all-position service

## HTL1 13/32"




ARTICLE #	WIDTH	DEPTH
18209250000	390	13/32"
18206790000	400	13/32"
18209120000	410	13/32"

- Optimized compound for regional/long hauling delivers high mileage.
- Proven 13/32" tread design.
- Shoulder defense groove provides protection against rapid shoulder wear.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

Application: Regional/Long Haul, SS Trailer Position

## HTL EP 13/32"




ARTICLE #	WIDTH	DEPTH
18208600000	200	13/32"
18204900000	210	13/32"
18204910000	220	13/32"
18204920000	230	13/32"
18206830000	240	13/32"

- Advanced, fuel efficient compound provides long original mileage and low rolling resistance.
- 13/32" tread depth minimizes tread squirm and irregular wear.
- Visual Alignment Indicators (VAI®) alert user to tire tracking problems.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

Application: Long Haul, Over the Highway, Trailer Position

## HTR2 22/32"



ARTICLE #	WIDTH	DEPTH
18206730000	290	22/32"
18206740000	320	22/32"
18206750000	340	22/32"

- High mileage achieved through precise balance of tread compound and geometry.
- Tread pattern designed for increased stability and reduced noise.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

Application: Local and Long Haul, All-Position Service

## HTC1 24/32"



ARTICLE #	WIDTH	DEPTH
18206760000	320	24/32"
18206770000	350	24/32"

- Aggressive multi-surface, all-position tread pattern provides excellent traction.
- Outstanding self-cleaning properties ensure a long service life.

Application: Super Single Fitment for Steer and Trailer Positions

# Recommended Buffing Specs

TREAD DESIGN	SIZE	LOAD RANGE	BUFF RADIUS	BUFFED CIRCUM	BUFF WIDTH
Conti EcoPlus HS3	295/75R22.5	G	650	3100	245
	295/75R22.5	H	650	3100	245
	11R22.5	G	650	3200	245
	11R22.5	H	650	3200	245
	11R24.5	G	650	3200	245
	11R24.5	H	650	3200	245
	285/75R24.5	G	650	3200	245
	285/75R24.5	H	650	3200	245
	295/60R22.5	J	650	2800	245
Conti Hybrid HS3	295/75R22.5	G	650	3100	245
	295/75R22.5	H	650	3100	245
	11R22.5	G	650	3200	245
	11R22.5	H	650	3200	245
HSL2 Eco Plus	11R22.5	G	600	3200	235
	11R22.5	H	600	3200	235
	11R24.5	G	600	3350	235
	11R24.5	H	600	3350	235
	275/80R22.5	G	600	3090	235
	275/80R22.5	H	600	3090	235
	285/75R24.5	G	600	3200	230
285/75R24.5	H	600	3200	230	
HSL2+ Eco Plus	295/60R22.5	J	750	2850	255
Conti Coach HA3	255/70R22.5	H	1100	2820	205
	275/70R22.5	J	800	2910	245
	315/80R22.5	L	800	3285	265
HSL1 Coach	315/80R22.5	L	1000	3270	260
Conti Hybrid HS3 - 19.5"	225/70R19.5	G	900	2450	200
	245/70R19.5	H	1100	2520	220
	265/70R19.5	H	1100	2620	225
	285/70R19.5	H	1100	2760	240
	305/70R19.5	J	1200	2790	245
Conti CrossTrac HA3	11R22.5	G	650	3200	245
	11R22.5	H	650	3200	245
	11R24.5	G	650	3350	245
	11R24.5	H	650	3350	245
	12R22.5	H	650	3300	245
	275/80R22.5	G	650	3100	245
	275/80R22.5	H	650	3100	245
	285/75R24.5	G	650	3200	245
	285/75R24.5	H	650	3200	245
	HSR2	10R22.5	G	650	3080
11R22.5		G	600	3190	230
11R22.5		H	600	3190	230
11R24.5		G	600	3345	230
11R24.5		H	600	3345	230
12R22.5		H	600	3300	240
275/80R22.5		G	550	3065	225
275/80R22.5		H	550	3065	225
285/75R24.5		G	900	3170	225
285/75R24.5		H	900	3170	225

TREAD DESIGN	SIZE	LOAD RANGE	BUFF RADIUS	BUFFED CIRCUM	BUFF WIDTH	
HSR2 Eco Plus	275/80R22.5	G	550	3065	225	
	275/80R22.5	H	550	3065	225	
HSR2 SA	255/70R22.5	H	750	2820	205	
	275/80R22.5	H	650	3080	225	
	295/80R22.5	H	1000	3230	255	
	315/80R22.5	L	1200	3285	260	
HSR1	225/70R19.5	G	600	2450	195	
	245/70R19.5	H	900	2530	210	
	265/70R19.5	H	900	2670	220	
	285/70R19.5	H	900	2710	225	
	305/70R19.5	J	900	2800	250	
	275/70R22.5	J	800	2930	240	
HSR	225/70R19.5	G	600	2460	195	
Conti Urban HA3	275/70R22.5	H	600	2920	245	
	305/70R22.5	J	600	3060	260	
HSU1	275/70R22.5	H	800	2870	240	
	305/70R22.5	J	750	3050	260	
HSU2 WT	315/80R22.5	L	600	3290	280	
Conti CityService HA3	315/80R22.5	L	800	3290	280	
HSC1	11R22.5	H	550	3195	215	
	11R24.5	H	900	3370	230	
	12R22.5	H	600	3300	240	
HCS	12R24.5	H	1200	3455	245	
	HCS	445/65R22.5	L	1500	3475	380
	LSU	215/75R17.5	F	450	2350	195
LSR1	LT225/75R16	E	500	2285	185	
	LT245/75R16	E	500	2380	205	
	10R17.5	H	650	2600	185	
	215/75R17.5	F	700	2330	185	
	235/75R17.5	F	1100	2450	200	
Conti EcoPlus HD3	11R22.5	G	850	3200	245	
	11R22.5	H	850	3200	245	
	11R24.5	G	850	3360	245	
	11R24.5	H	850	3360	245	
	295/75R22.5	G	850	3100	245	
	295/75R22.5	H	850	3100	245	
	285/75R24.5	G	850	3200	245	
	285/75R24.5	H	850	3200	245	
	295/60R22.5	J	850	2785	245	
	Conti Hybrid HD3 - 19.5"	225/70R19.5	G	900	2450	195
245/70R19.5		G	1100	2545	225	
245/70R19.5		H	1100	2545	225	
265/70R19.5		H	1100	2650	235	
285/70R19.5		H	1100	2745	245	
Conti Hybrid HD3	11R22.5	G	850	3200	245	
	11R22.5	H	850	3200	245	
	11R24.5	G	850	3360	245	
	11R24.5	H	850	3360	245	
	295/75R22.5	G	850	3100	245	
	225/70R19.5	G	900	2460	195	

TREAD DESIGN	SIZE	LOAD RANGE	BUFF RADIUS	BUFFED CIRCUM	BUFF WIDTH
HDL Eco Plus	11R22.5	G	600	3200	225
	11R22.5	H	600	3200	225
	11R24.5	G	600	3360	225
	11R24.5	H	600	3360	225
	275/80R22.5	G	600	3100	225
	275/80R22.5	H	600	3100	225
	285/75R24.5	G	600	3100	225
	285/75R24.5	H	600	3100	225
HDL2	295/75R22.5	G	800	3100	245
	295/75R22.5	H	800	3100	245
	11R22.5	G	900	3200	245
	11R22.5	H	900	3200	245
	11R24.5	G	900	3360	245
	11R24.5	H	900	3360	245
	285/75R24.5	G	900	3200	245
	285/75R24.5	H	900	3200	245
HDL2 DL	11R22.5	G	900	3200	245
	11R22.5	H	900	3200	245
	11R24.5	G	900	3360	245
	11R24.5	H	900	3360	245
	275/80R22.5	G	900	3100	245
	285/75R24.5	G	900	3200	245
HDL2 DL Eco Plus	275/80R22.5	G	900	3100	245
	285/75R24.5	G	900	3200	245
	11R22.5	G	900	3200	245
	11R22.5	H	900	3200	245
	11R24.5	G	900	3360	245
	11R24.5	H	900	3360	245
HDL2+ Eco Plus	295/60R22.5	J	900	2820	255
HDR2	11R22.5	G	850	3200	245
	11R22.5	H	850	3200	245
	11R24.5	G	850	3360	245
	11R24.5	H	850	3360	245
	12R22.5	H	600	3290	240
	295/75R22.5	G	850	3100	245
	295/75R22.5	H	850	3100	245
	285/75R24.5	G	850	3200	245
	285/75R24.5	H	850	3200	245
	315/80R22.5	L	750	3290	260
	HDR2 Eco Plus	11R22.5	G	850	3200
11R22.5		H	850	3200	245
295/75R22.5		G	850	3100	245
295/75R22.5		H	850	3100	245
HDR1		11R22.5	G	600	3200
	11R22.5	H	600	3200	220
	11R24.5	G	600	3345	220
	11R24.5	H	600	3345	220
	275/80R22.5	G	600	3100	225
	275/80R22.5	H	600	3100	225
	285/75R24.5	G	600	3200	225
	285/75R24.5	H	600	3200	225
	HDR1 Eco Plus	275/80R22.5	G	600	3100
275/80R22.5		H	600	3100	225

TREAD DESIGN	SIZE	LOAD RANGE	BUFF RADIUS	BUFFED CIRCUM	BUFF WIDTH
HDR	225/70R19.5	G	900	2450	190
	245/70R19.5	H	1200	2525	215
	265/70R19.5	H	900	2660	225
	285/70R19.5	H	800	2700	245
	255/70R22.5	H	700	2780	210
	275/70R22.5	H	650	2900	245
	HDC1 HT	11R22.5	H	700	3360
11R24.5		H	700	3360	245
HDC1	11R22.5	H	600	3200	225
	11R24.5	H	600	3360	225
HDO	11R22.5	H	600	3200	225
	11R24.5	H	600	3360	225
Conti Terra HD3 - 19.5"	225/70R19.5	G	900	2460	195
	245/70R19.5	H	1000	2540	220
Conti Scandinavia HD3 - 19.5"	225/70R19.5	G	900	2460	195
	245/70R19.5	H	1100	2540	220
HDW2	11R22.5	H	600	3200	250
	11R24.5	H	600	3360	250
	315/80R22.5	L	800	3230	260
LDR1	215/75R17.5	F	700	2340	190
	235/75R17.5	F	1100	2430	205
Conti EcoPlus HT3	11R22.5	G	700	3185	245
	11R22.5	H	700	3185	245
	11R24.5	G	700	3185	245
	11R24.5	H	700	3185	245
	295/75R22.5	G	900	3100	245
	285/75R24.5	G	900	3180	245
HTL2 Eco Plus	215/75R17.5	J	500	2340	180
	235/75R17.5	J	500	2430	195
	245/70R17.5	J	700	2465	200
HTL1	445/50R22.5	L	2200	3050	405
HTR2 - 17.5"	215/75R17.5	H	500	2340	180
	235/75R17.5	H	700	2430	200
HTR2	385/65R22.5	L	1500	3240	315
	425/65R22.5	L	1000	3415	340
	445/65R22.5	L	1000	3570	355
HTL EcoPlus	11R22.5	G	550	3200	220
	11R24.5	G	550	3350	220
	255/70R22.5	H	650	2780	210
	275/80R22.5	G	500	3100	225
	285/75R24.5	G	500	3200	225
Conti Hybrid HT3 - 19.5"	245/70R19.5	J	700	2530	225
	265/70R19.5	J	700	2620	235
	285/70R19.5	J	700	2700	245
HTR1	265/70R19.5	J	900	2630	225
	285/70R19.5	J	900	2715	235
HTC1	385/65R22.5	L	1500	3225	310
	425/65R22.5	L	1500	3420	330
	445/65R22.5	L	1400	3485	370
HTC	275/70R22.5	H	650	2940	235